




FLOW CONTROL VALVE (Fully Adjustable Needle)

Ordering Code: **NV-16W-X-Y-Z**

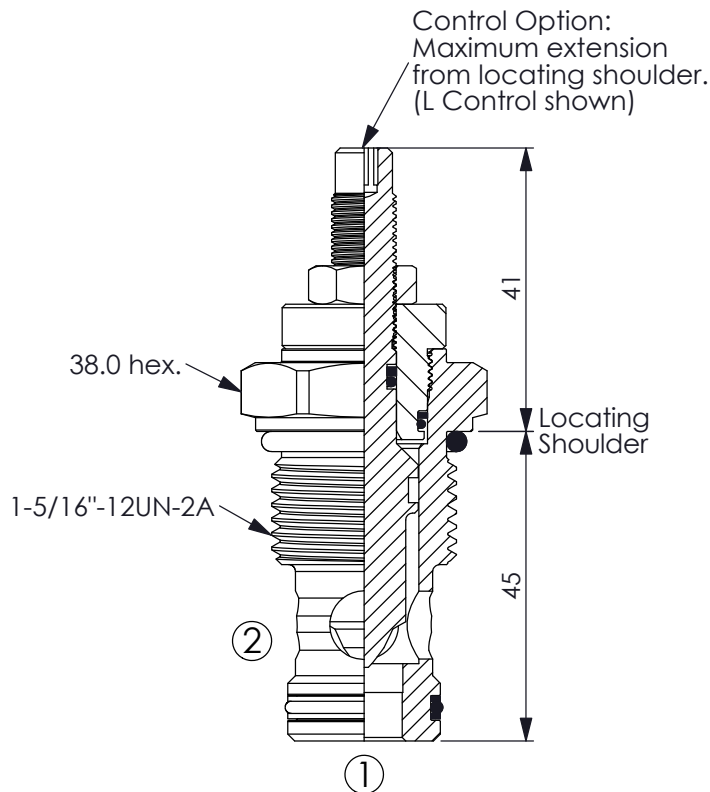

UNIT:mm

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

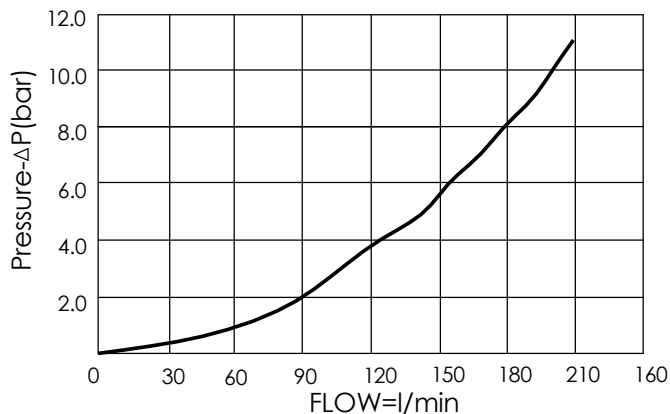

TECHNICAL DATA

Max. pressure:	350	bar
Rated Flow:	165 l/min ($\Delta P=7$ bar) See Performance Chart	
Cavity-Tooling:	16W-2	
Installation torque:	60-70	Nm
Weight:	0.3	kg

X OPERATION

20 Needle Valve

Z OPTIONS

L	Leakproof hex. socket screw.	
E	Handknob and locknut.	
B	Handknob and aluminum locknut.	

Y MAXIMUM NOMINAL ORIFICE

N (Standard)