



MB-3 *SERIES*

Monoblock Directional Control Valves

FOR MOBILE AND INDUSTRIAL
HYDRAULIC APPLICATIONS



Innovative Designs
Professional Quality
Customer Satisfaction !



油力油壓工業股份有限公司
YOU LI HYDRAULIC INDUSTRIAL CO.,LTD.

公司：41163 台中市太平區溪洲路 87 巷 7 號
工廠：41468 台中市烏日區太明路 145 巷 9 號

OFFICE & FACTORY :

No.9, LANE 145, TAI MING RD., WU ZIH DIST., TAICHUNG CITY, TAIWAN 41468
TEL : 886-4-2335 8996 FAX : 886-4-2335 8997
Http://www.tw-youli.com.tw/ E-mail : sales@tw-youli.com.tw

版權所有 翻印必究
COPY RIGHTS RESERVED

01.2014 / 500 03-136E/S
Survey 04-2322 7907

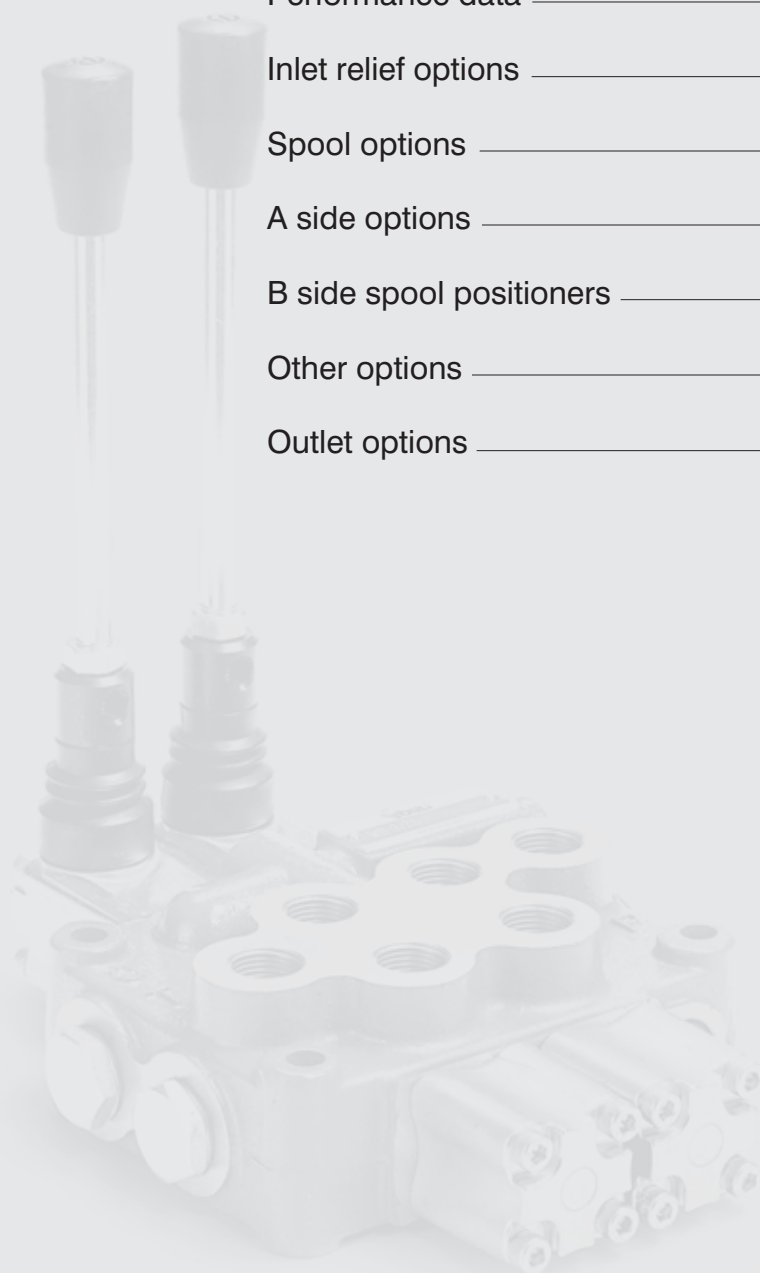


油力油壓工業股份有限公司
YOU LI HYDRAULIC INDUSTRIAL CO.,LTD.

MB-3 Chapters

Monoblock Directional Control Valves

Working condition	P.5
Ordering code	P.6
Dimensions	P.9
Performance data	P.10
Inlet relief options	P.11
Spool options	P.12
A side options	P.19
B side spool positioners	P.23
Other options	P.33
Outlet options	P.36





For Mobile And Industrial
Hydraulic Applications.

MONOBLOCK DIRECTIONAL CONTROL VALVES

MB-2 / MB-3 / MB-4 / MB-5 / MSB-5

SECTIONAL DIRECTIONAL CONTROL VALVES

SN-3 / SN-4 / SN-6 / SN-8



MB-2

ONLY ONE SECTION AVAILABLE

Nominal flow rate	45 l/min	12 US gpm
Operating pressure (maximum)	250 bar	3600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



MB-3

AVAILABLE SECTIONS FROM 1 TO 7

Nominal flow rate	45 l/min	12 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



MB-4

AVAILABLE SECTIONS FROM 1 TO 6

Nominal flow rate	60 l/min	16 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



MB-5

AVAILABLE SECTIONS FROM 1 TO 6

Nominal flow rate	80 l/min	21 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



MSB-5

AVAILABLE SECTIONS FROM 1 TO 6

With Independent load check valve in each section, and optional port relief.

Nominal flow rate	80 l/min	21 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



SN-3

AVAILABLE SECTIONS FROM 1 TO 12

Nominal flow rate	50 l/min	13 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



SN-4

AVAILABLE SECTIONS FROM 1 TO 12

Nominal flow rate	80 l/min	21 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



SN-6

AVAILABLE SECTIONS FROM 1 TO 12


Nominal flow rate	140 l/min	37 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi



SN-8

AVAILABLE SECTIONS FROM 1 TO 12

Nominal flow rate	240 l/min	63 US gpm
Operating pressure (maximum)	315 bar	4600 psi
Back pressure (maximum) on outlet port T	25 bar	360 psi

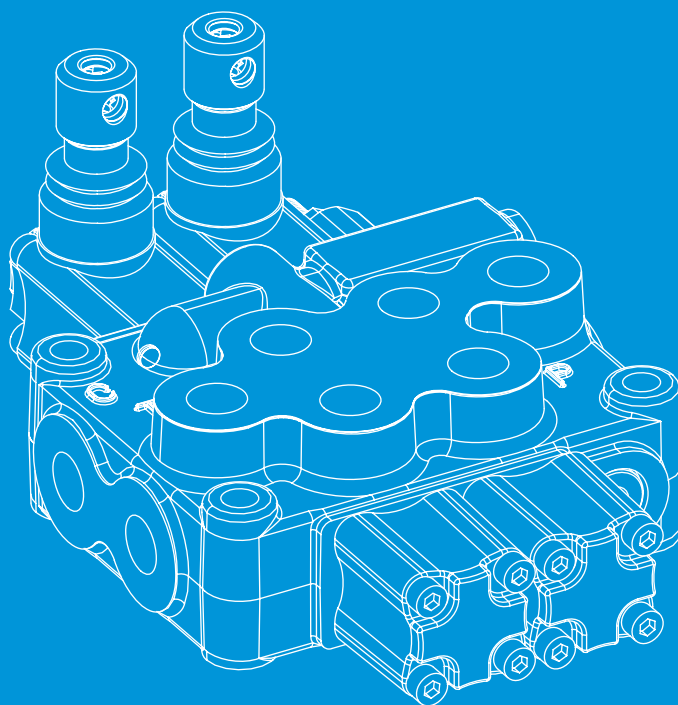

Innovative Designs
Professional Quality
Customer Satisfaction !

AVAILABLE SECTIONS FROM

1 TO 7

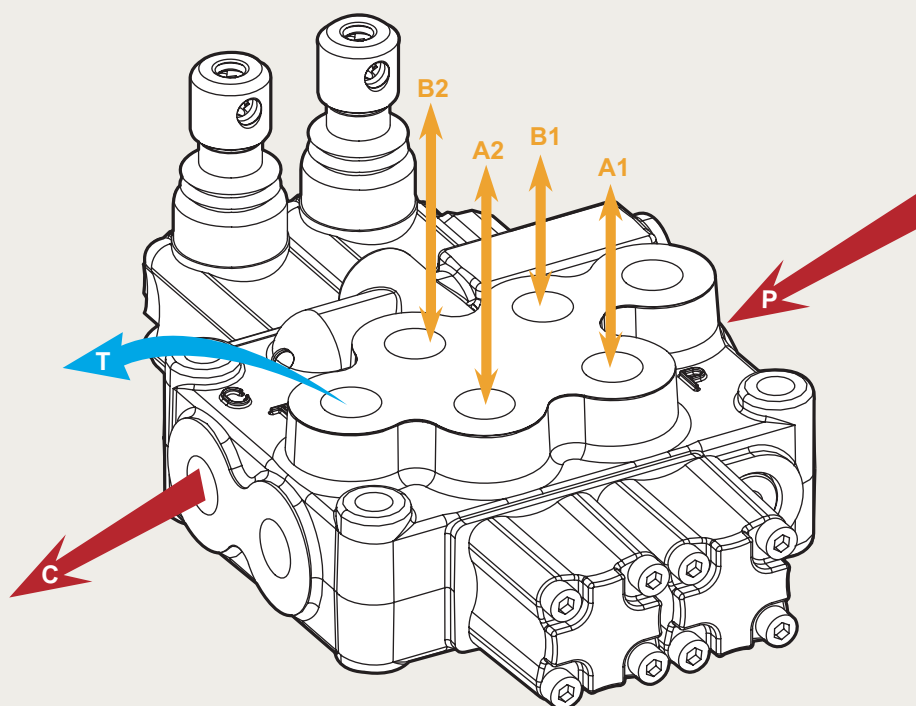
MB-3

Monoblock Directional Control Valves



MB-3

Monoblock Directional Control Valves




MB-3 Specifications

Nominal flow rate		45 l/min	12 US gpm
Operating pressure (maximum)		315 bar	4600 psi
Back pressure (maximum)	on outlet port T	25 bar	360 psi
Fluid temperature range	with NBR(BUNA-N) seals	from - 20° to 80°C	from - 4° to 176° F
	with FPM(VITON) seal	from - 20° to 100°C	from - 4° to 212° F
Viscosity	operating range	from 15 to 75 mm²/s	from 15 to 75 cst
	min	12 mm²/s	12 cst
	max.	400 mm²/s	400 cst
Ambient temperature range		from - 40° to 60°C	from - 40° to 140° F

• All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.

MB-3

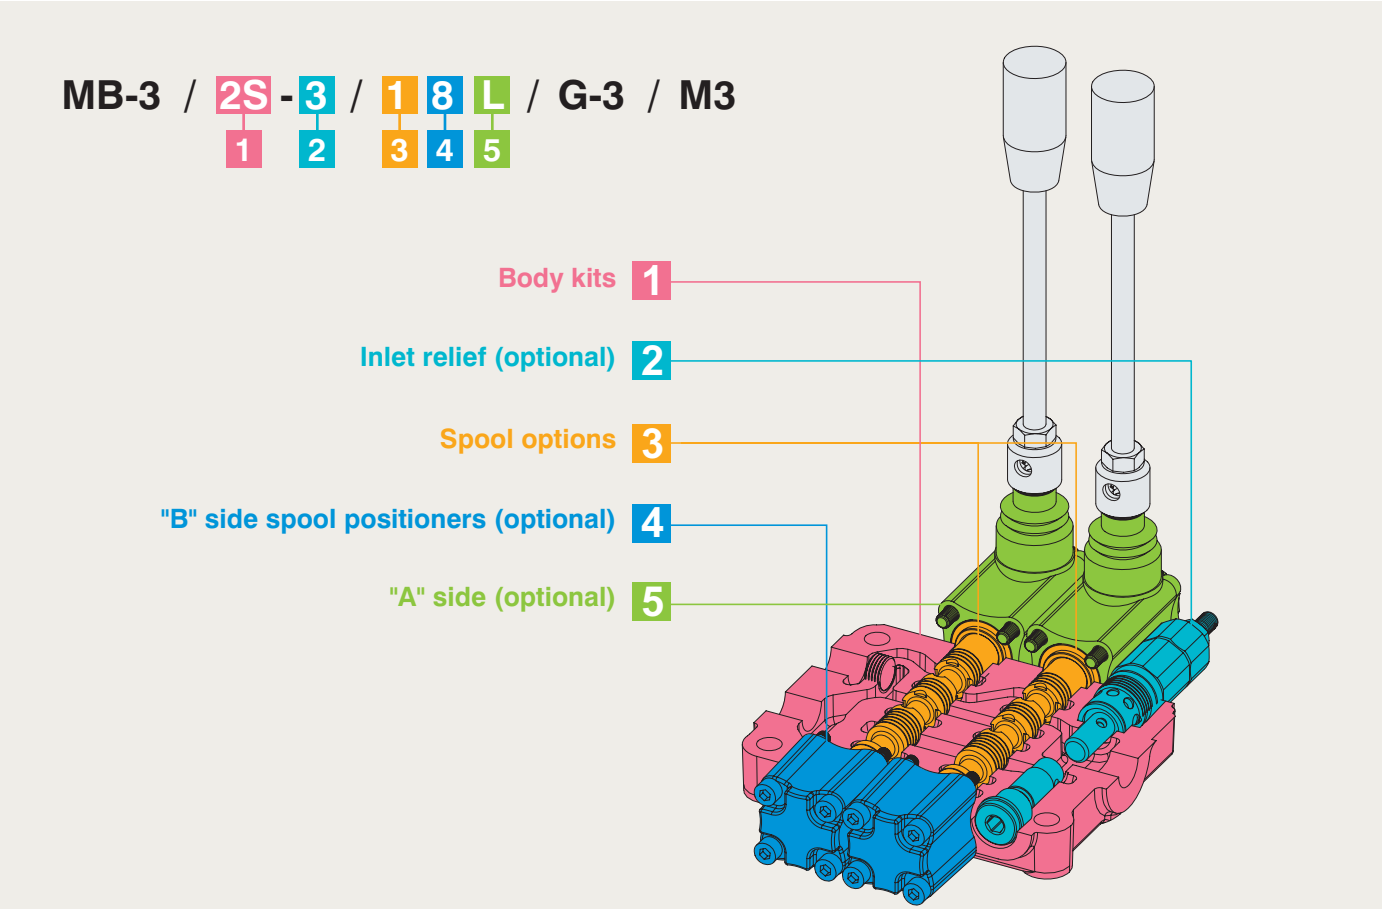Monoblock Directional Control Valves



1:	Body kits	WITHOUT SERVICE PORT VALVES PREARRANGEMENT (INCLUDE BODY, SEALS, RINGS AND LOAD CHECK VALVE.)	
TYPE		DESCRIPTION	
1 - S		1 section	
2 - S		2 sections	
3 - S		3 sections	
4 - S		4 sections	
5 - S		5 sections	
6 - S		6 sections	

2:	Inlet Relief (optional)		
TYPE		CODE	PAGE
DG-2		YLMB32002	P. 11
DG-3		YLMB32003	P. 11
DG-4		YLMB32004	P. 11
SV		YLMB32100	P. 11
		DESCRIPTION	
		Range 40 to 80 bar / 580 to 1150 psi, standard setting 80 bar / 1150 psi	
		Range 63 to 200 bar / 900 to 2900 psi, standard setting 120 bar / 1750 psi	
		Range 160 to 315 bar / 2300 to 4600 psi, standard setting 220 bar / 3200 psi	
		Relief valve blanking plug	

MB-3


Monoblock Directional Control Valves

3: Spool Options			
TYPE	CODE	DESCRIPTION	PAGE
1	YLMB33001	Double acting, 3 positions, with A, B closed in neutral position	P. 12
2	YLMB33002	Double acting, 3 positions, with A, B open to Tank in neutral position	P. 12
3	YLMB33003	Single acting on A closed in neutral position, 3 positions, B plugged	P. 13
5	YLMB33005	Double acting, 3 positions, with B open to Tank in neutral position	P. 13
6	YLMB33006	Double acting, 3 positions, with A open to Tank in neutral position	P. 14
7	YLMB33007	Single acting on A open to Tank in neutral position, 3 positions, B plugged	P. 14
9	YLMB33009	Double acting, 3 positions, with P, T, A, B closed in neutral position (Closed center)	P. 15
1 0	YLMB33010	Double acting, 3 positions, with A, B open to Tank and P, T closed in neutral position (Closed center)	P. 15
5DY	YLMB33052	Double acting, 4 position, floating circuit in 4th position with A, B open to Tank by pulling the lever	P. 16
5PYX	YLMB330511	Double acting, 4 positions, floating circuit in 4th position with A, B open to Tank by pushing the lever (with check valve)	P. 16
5PY	YLMB33051	Double acting, 4 positions, floating circuit in 4th position with A, B open to Tank by pushing the lever	P. 17
Z41	YLMB33041	Double acting, 4 positions, regenerative circuit in 4th position with P open to A, B by pulling the lever (Rest in pos. 1)	P. 17
Z42	YLMB33042	Double acting, 4 positions, regenerative circuit in 4th position with P open to A, B by pulling the lever (Rest in pos. 0)	P. 18

4: B Side Spool Positioners			
TYPE	CODE	DESCRIPTION	PAGE
6-1	YLMB44061	Detent in pos. 1-0-2, without spring centered	P. 22
6-2	YLMB44062	2 positions, detent in pos. 0-2, without spring centered	P. 22
6-3	YLMB44063	2 positions, detent in pos. 1-0, without spring centered	P. 22
8D2	YLMB44200	With spring return to neutral position and pin with M8 male thread for dual control	P. 22
8EP3	YLMB44300	ON/OFF Electro-Pneumatic actuator	P. 23
8P	YLMB44080	ON/OFF Pneumatic actuator	P. 23
8MG1 (NO)	YLMB44801	Microswitch kit operated in pos. 1 (Normally Open)	P. 26
8MG2 (NO)	YLMB44802	Microswitch kit operated in pos. 2 (Normally Open)	P. 26
8MG3 (NO)	YLMB44803	Microswitch kit operated in pos. 1&2 (Normally Open)	P. 26
MG (NO)	YLMB44804	Microswitch with NO terminal	P. 26
8MG1 (NC)	YLMB448011	Microswitch kit operated in pos. 1 (Normally Closed)	P. 26
8MG2 (NC)	YLMB448021	Microswitch kit operated in pos. 2 (Normally Closed)	P. 26
8MG3 (NC)	YLMB448031	Microswitch kit operated in pos. 1&2 (Normally Closed)	P. 26
MG (NC)	YLMB448041	Microswitch with NC terminal	P. 26
8	YLMB44008	With spring return to neutral position	P. 27
8-1	YLMB44081	2 positions, with spring centered from pos. 1	P. 27
8-2	YLMB44082	2 positions, with spring centered from pos. 2	P. 27
9-1	YLMB44091	Detent in pos. 1, 2 with spring centered	P. 27
9-2	YLMB44092	Detent in pos. 2 with spring centered	P. 27
9-3	YLMB44093	Detent in pos. 1 with spring centered	P. 27

MB-3

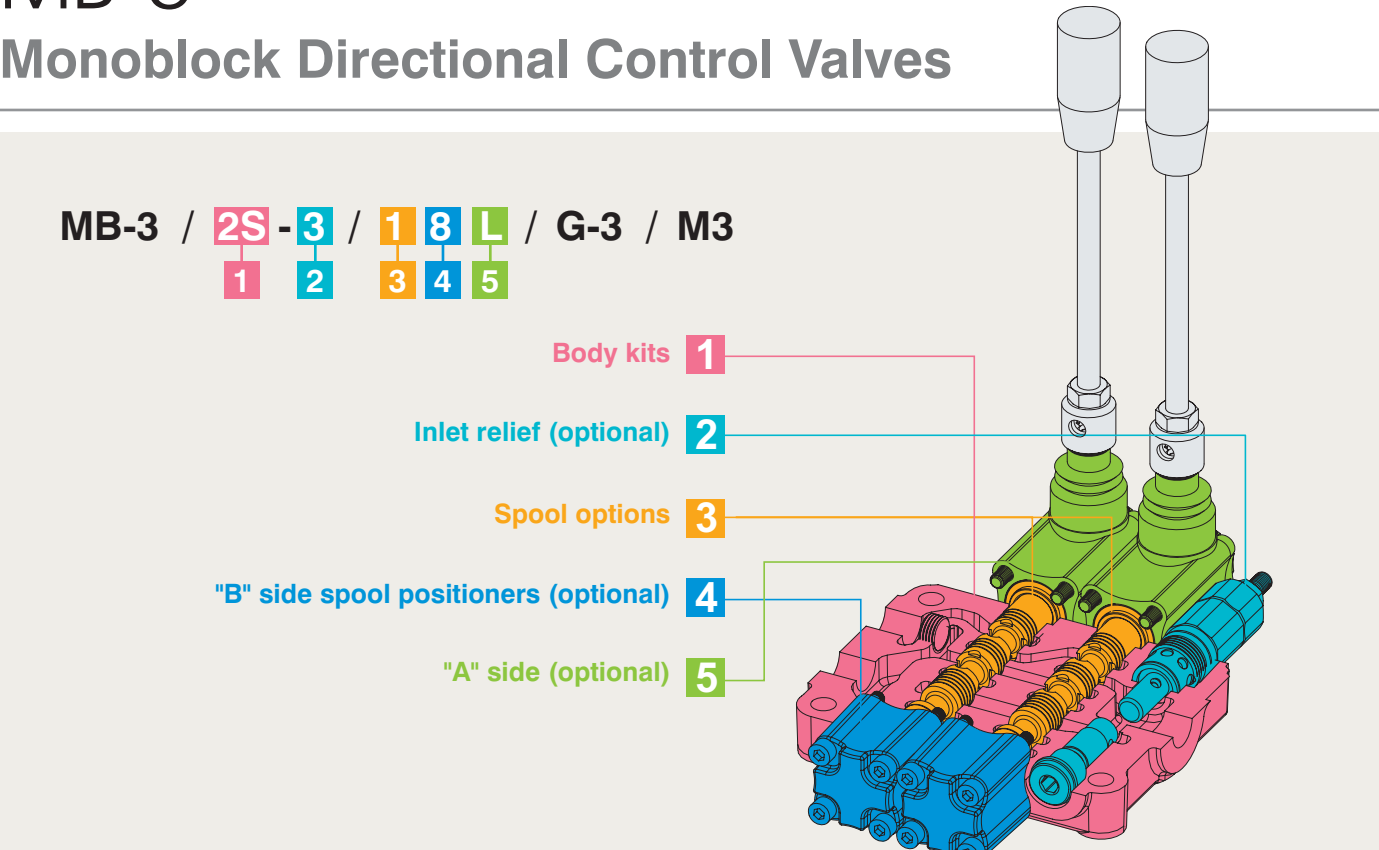Monoblock Directional Control Valves



4: B Side Spool Positioners


TYPE	CODE	DESCRIPTION	PAGE
8ED3+RV-KE1R3	YLMB44201	1S: ON/OFF Electro-Hydraulic control kit with pilot and drain line+backpressure valve (12/24 VDC)	P. 24
8ED3+RV-KE2R3	YLMB44202	2S: ON/OFF Electro-Hydraulic control kit with pilot and drain line+backpressure valve (12/24 VDC)	P. 24
8ED3+RV-KE3R3	YLMB44203	3S: ON/OFF Electro-Hydraulic control kit with pilot and drain line+backpressure valve (12/24 VDC)	P. 24
8ED3+RV-KE4R3	YLMB44204	4S: ON/OFF Electro-Hydraulic control kit with pilot and drain line+backpressure valve (12/24 VDC)	P. 24
8ED3+RV-KE5R3	YLMB44205	5S: ON/OFF Electro-Hydraulic control kit with pilot and drain line+backpressure valve (12/24 VDC)	P. 24
8ED3+RV-KE6R3	YLMB44206	6S: ON/OFF Electro-Hydraulic control kit with pilot and drain line+backpressure valve (12/24 VDC)	P. 24
8ER3+KE1S0	YLMB44401	1S: ON/OFF Electro-hydraulic control kit with collector kit for external pilot and drain	P. 25
8ER3+KE2S0	YLMB44402	2S: ON/OFF Electro-hydraulic control kit with collector kit for external pilot and drain	P. 25
8ER3+KE3S0	YLMB44403	3S: ON/OFF Electro-hydraulic control kit with collector kit for external pilot and drain	P. 25
8ER3+KE4S0	YLMB44404	4S: ON/OFF Electro-hydraulic control kit with collector kit for external pilot and drain	P. 25
8ER3+KE5S0	YLMB44405	5S:ON/OFF Electro-hydraulic control kit with collector kit for external pilot and drain	P. 25
8ER3+KE6S0	YLMB44406	6S: ON/OFF Electro-hydraulic control kit with collector kit for external pilot and drain	P. 25

5: A Side (optional)

TYPE	CODE	DESCRIPTION	PAGE
L	YLMB45000	Standard lever box	P. 19
SLP	YLMB45001	Without lever box, with dust-proof plate	P. 19
LCB	YLMB45002	Joystick lever for 2 section operation	P. 20
TQ	YLMB45003	Flexible cable connection	P. 21

MB-3 Dimensions

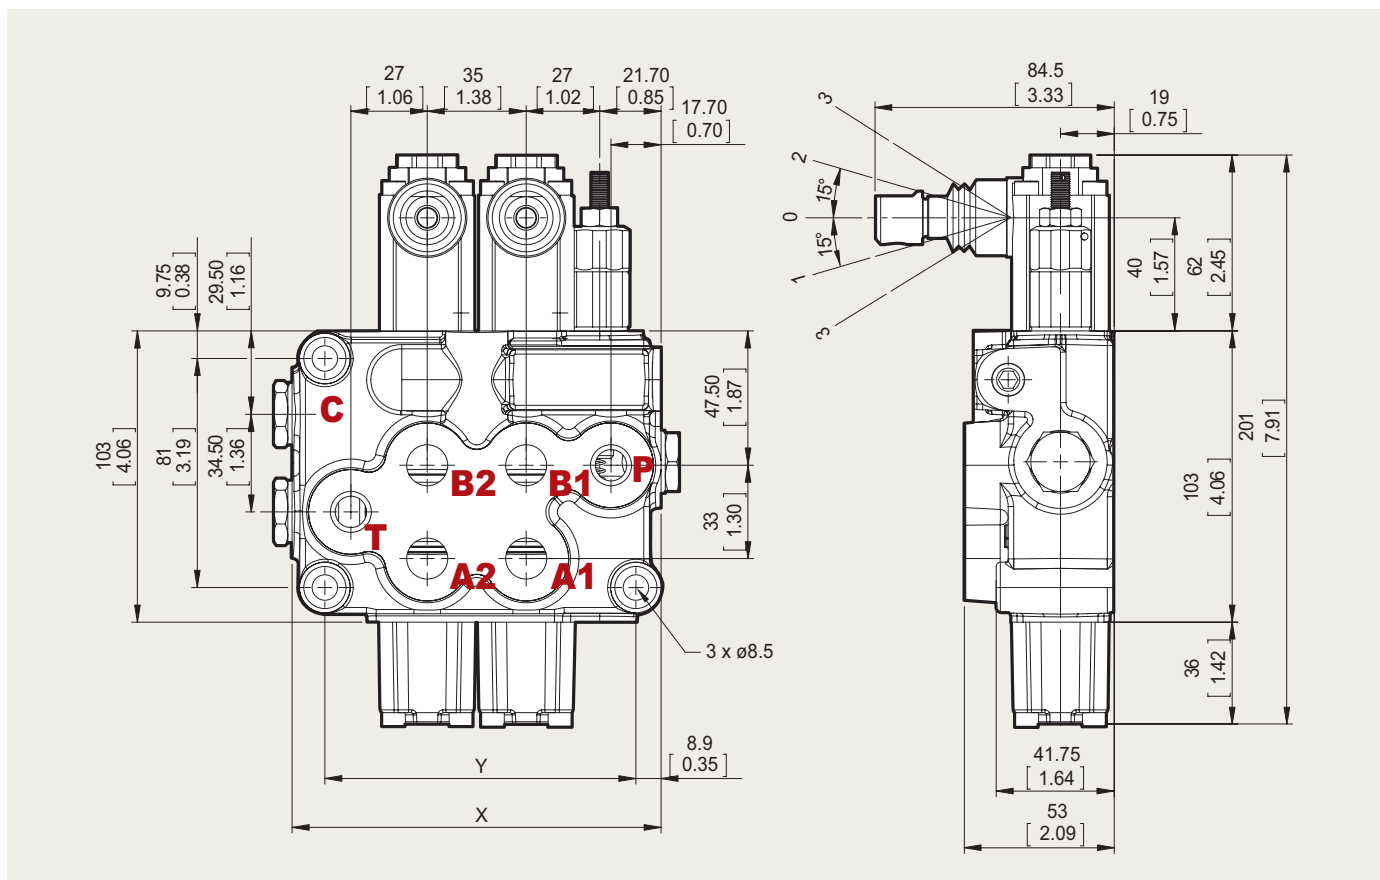Monoblock Directional Control Valves



Standard threads

Ports	Inlet P	A and B	Outlet T and C
BSP	G3/8	G3/8	G3/8
UN-UNF	3/4-16 UNF-2B (SAE 8)	3/4-16 UNF-2B (SAE 8)	3/4-16 UNF-2B (SAE 8)
METRIC	M18x1.5	M18x1.5	M18x1.5


• G-3/8 : G3 G-1/2 : G4 G-3/4 : G6 G-1 : G8 G-1 1/4 : G10
 • SAE 8: E8 SAE 10: E10 SAE 12: E12 SAE 16: E16 SAE 20: E20

Standard dimensions

TYPE	X		Y	
	mm	in	mm	in
MB3 /1S	93.5	3.68	73	2.87
MB3 /2S	130.5	5.14	110	4.33
MB3 /3S	165.5	6.52	147	5.79
MB3 /4S	202.5	7.97	184	7.24
MB3 /5S	239.5	9.43	221	8.7
MB3 /6S	276.5	10.89	258	10.16
MB3 /7S	313.5	12.34	295	11.61


MB-3 Performance curve chart

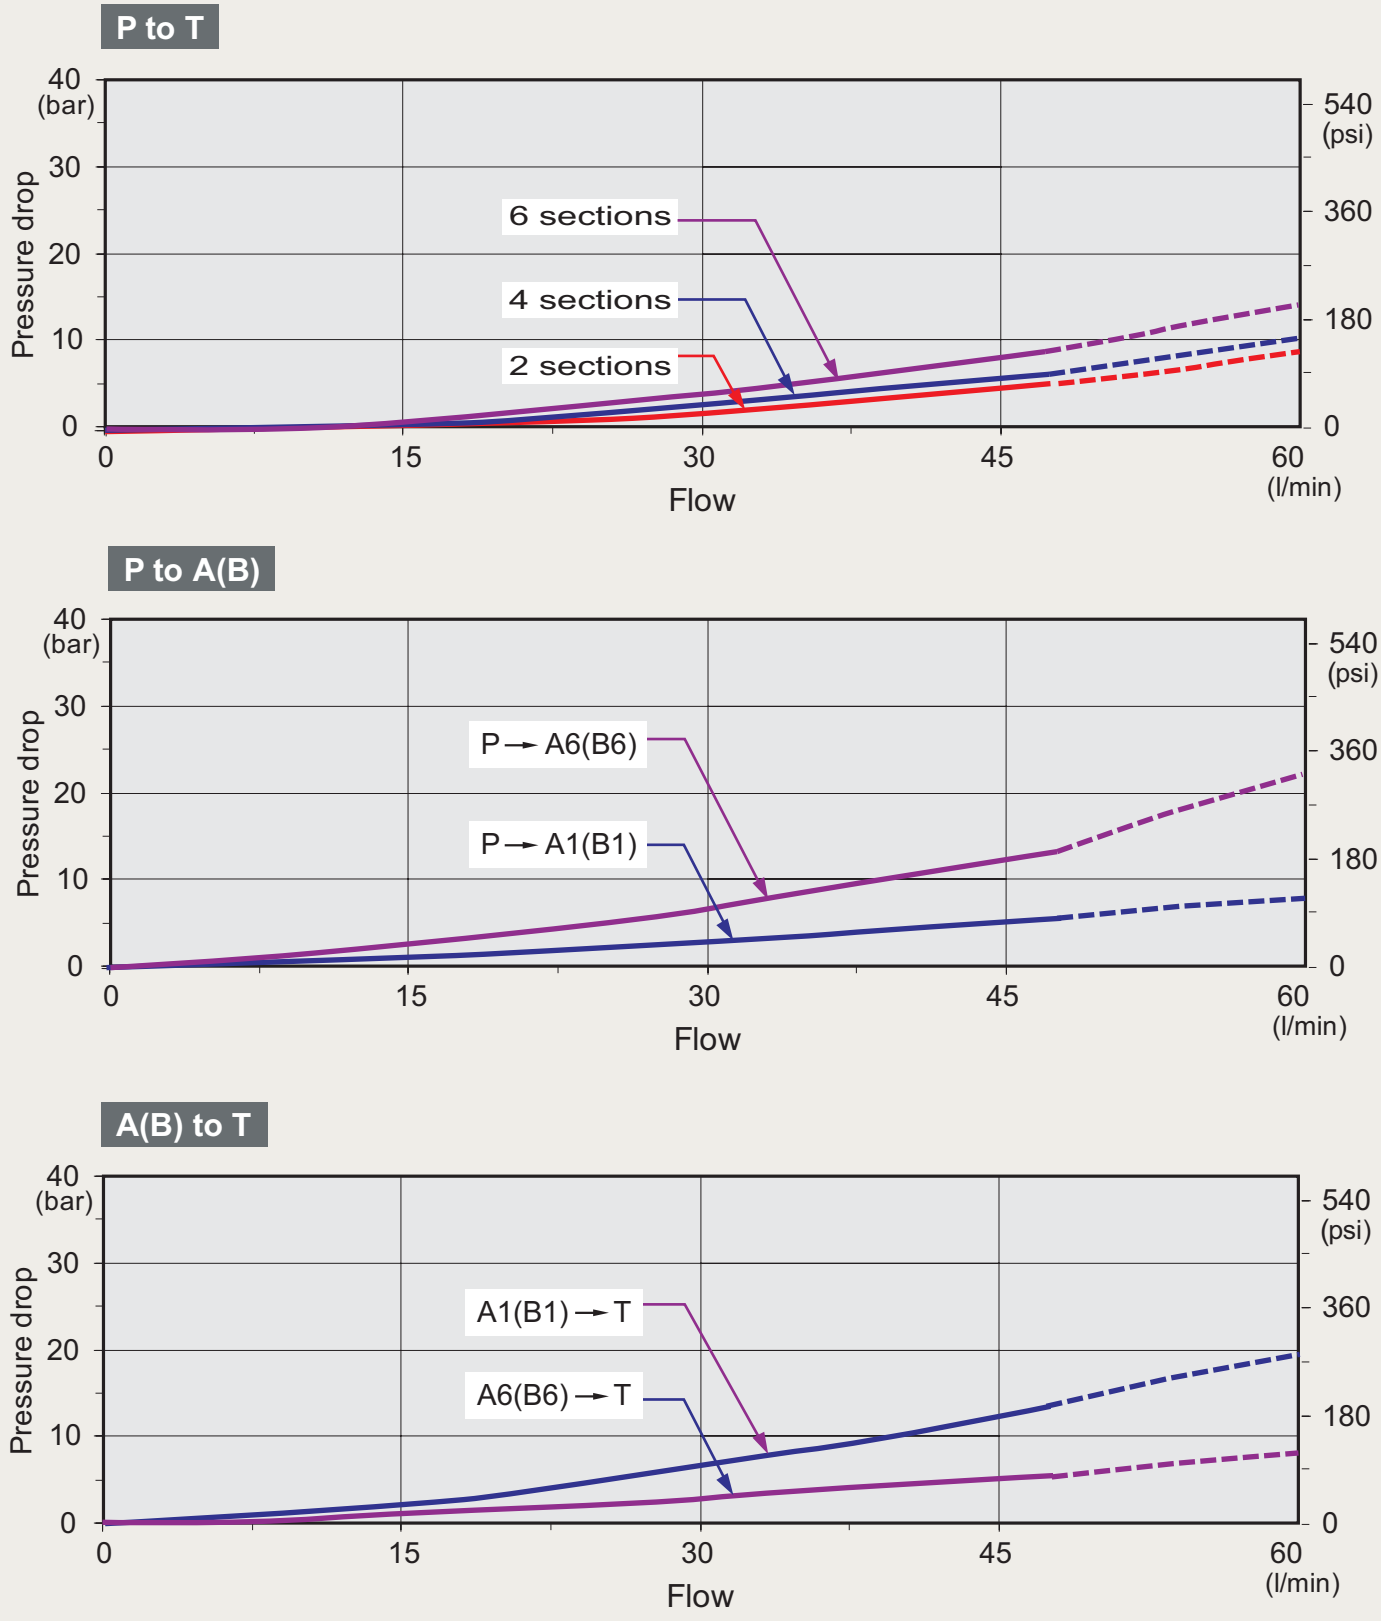Monoblock Directional Control Valves




MB-3 Inlet Relief (Optional) Monoblock Directional Control Valves

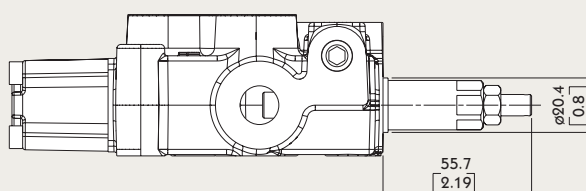
Type DG



Direct pressure relief valve:



Type SV






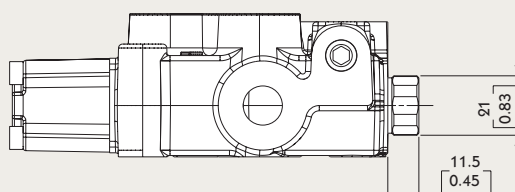








Relief valve blanking plug:



MB-3 spool Options







Monoblock Directional Control Valves







TYPE 1		
	P → B A → T C closed	
	A & B & P & T closed C open	
	P → A B → T C closed	

TYPE 2		
	P → B A → T C closed	
	A & B → T P closed C open	
	P → A B → T C closed	

MB-3 Spool Options







Monoblock Directional Control Valves







TYPE 3		
	P → A C & T closed	1 0 2  "B" port plugged
	P & A & T closed C open	1 0 2  "B" port plugged
	A → T P closed C open	1 0 2  "B" port plugged

TYPE 5		
	P → A B → T C closed	1 0 2 
	B → T A & P closed C open	1 0 2 
	P → B A → T C closed	1 0 2 

MB-3 spool Options













Monoblock Directional Control Valves

TYPE 6		
	P → A B → T C closed	
	A → T P & B closed C open	
	P → B A → T C closed	

TYPE 7		
	P → A C & T closed	 "B" port plugged
	A → T P closed C open	 "B" port plugged
	A → T P closed C open	 "B" port plugged

MB-3 Spool Options

Monoblock Directional Control Valves

TYPE 9		
	P → A B → T C closed	
	A & B & P & T closed C closed	
	P → B A → T C closed	
TYPE 10		
	P → A B → T C closed	
	A & B → T P & C closed	
	P → B A → T C closed	

MB-3 spool Options









Monoblock Directional Control Valves









TYPE 5DY	NOTE: WITH SPECIAL BODY AND SPECIAL POSITIONER	
	P → A B → T C closed	
	P & A & B & T closed C open	
	P → B A → T C closed	
	A & B → T P closed C open	

TYPE 5PYX	NOTE: WITH SPECIAL BODY AND SPECIAL POSITIONER	
	A & B → T P closed C open	
	P → A B → T C closed	
	P & A & B & T closed C open	
	P → B A → T C closed	

MB-3 spool Options








Monoblock Directional Control Valves

TYPE 5PY		NOTE: WITH SPECIAL BODY AND SPECIAL POSITIONER	
	A & B → T P closed C open		
	P → A B → T C closed		
	P & A & B & T closed C open		
	P → B A → T C closed		

TYPE Z41		NOTE: WITH SPECIAL BODY AND SPECIAL POSITIONER	
	P → A B → T C closed	 Rest in pos. 1	
	P & A & B & T closed C open		
	P → B A → T C closed		
	P → A & B T & C closed		





MB-3 spool Options

Monoblock Directional Control Valves

TYPE Z42		NOTE: WITH SPECIAL BODY AND SPECIAL POSITIONER	
	P → A B → T C closed		
	P & A & B & T closed C open		Rest in pos. 0
	P → B A → T C closed		
	P → A & B T & C closed		

MB-3 A Side

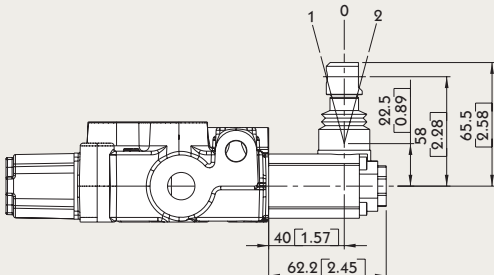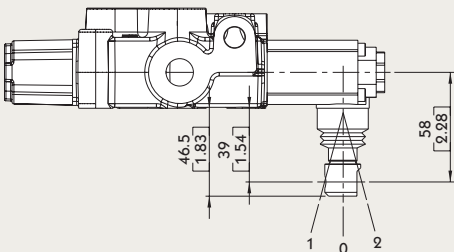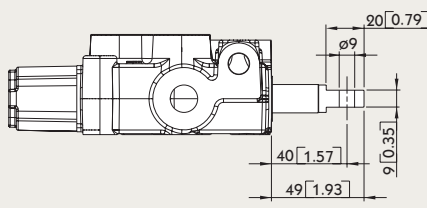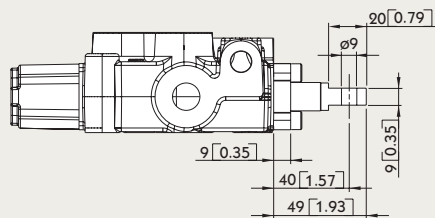Monoblock Directional Control Valves

Type L		
		Type L : STANDART LEVER KIT
Type R		
		Type R : STANDART LEVER KIT (ROTATED 180 DEGREE)
Type SL		
		Type SL : WITHOUT ANY COVER
Type SLP		
		Type SLP : WITH DUST-PROOF PLATE

MB-3 A Side

Monoblock Directional Control Valves

LCB: Joystick control


1	0	2
1	0	2

Type LCB	LCB1	LCB2
Type LCB	LCB3	LCB4


MB-3 A Side

Monoblock Directional Control Valves

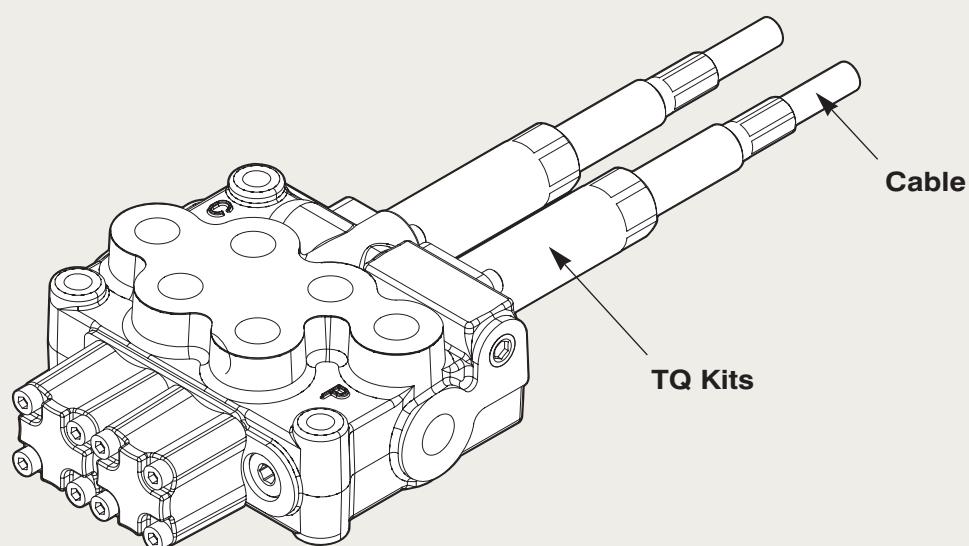Note : CONNECTION KIT NOT INCLUDE CABLE



Type TQ

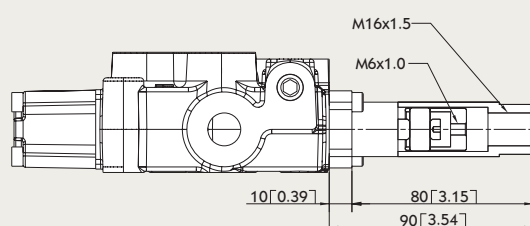


TQ Kit:




MB-3 A Side

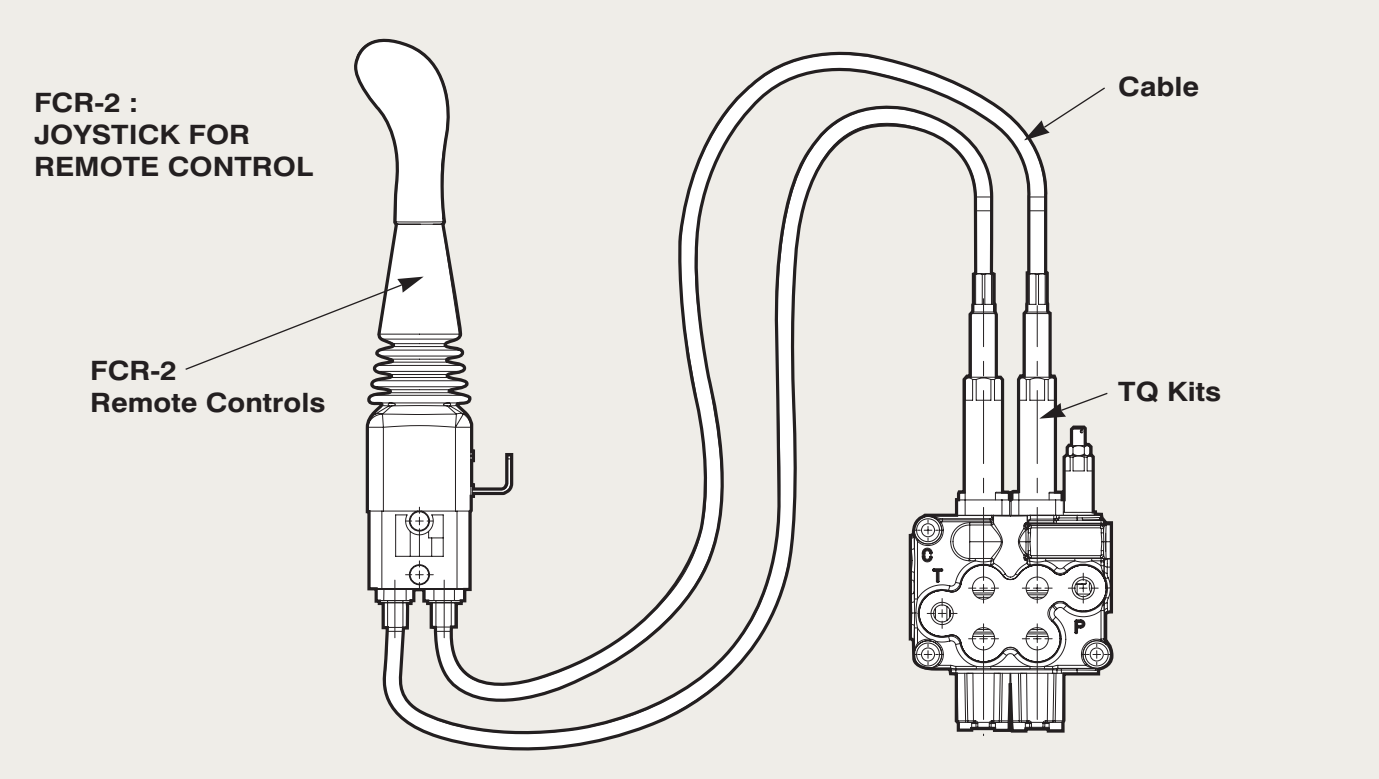Monoblock Directional Control Valves




Type FCR-2

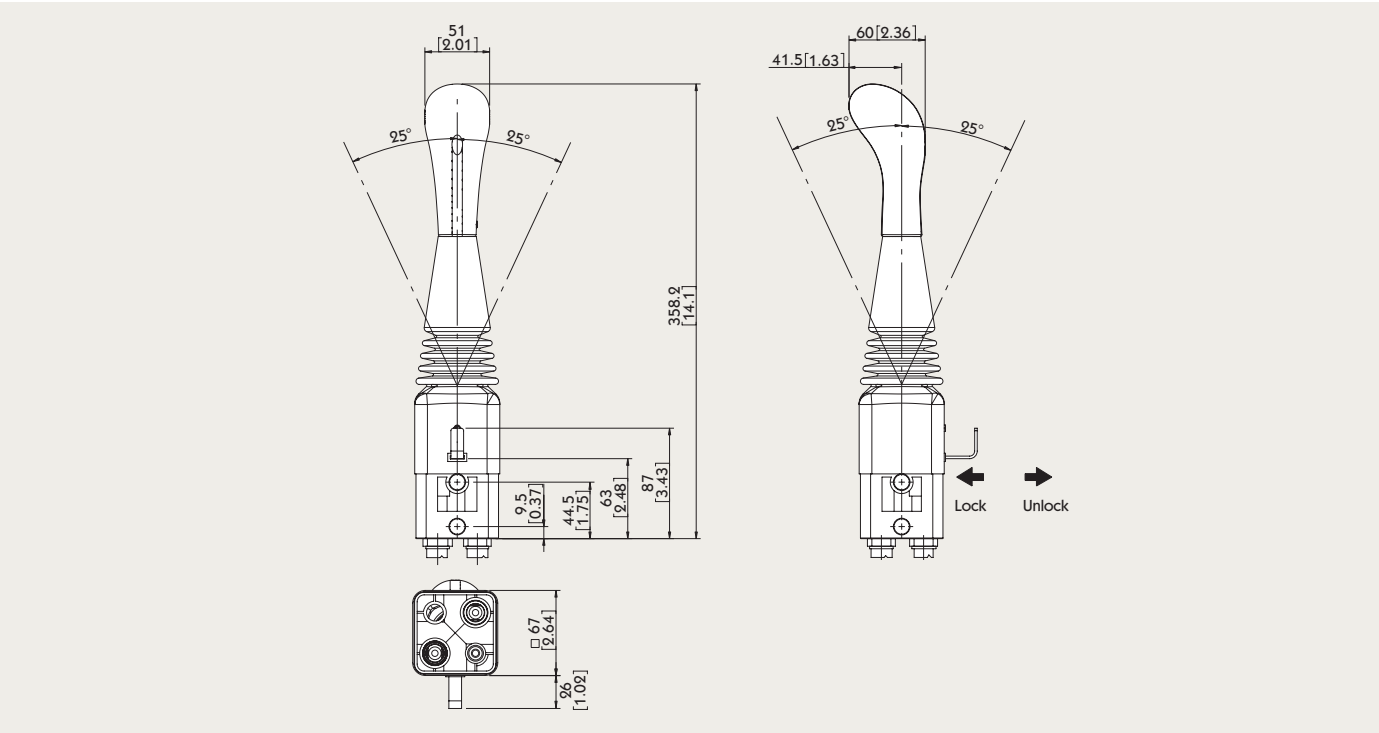

MB-3 B Side

Monoblock Directional Control Valves

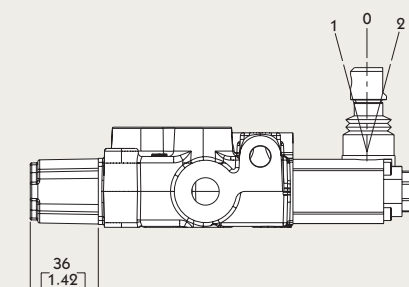Type 6



6-1 Kit:

DETENT IN POS. 1-0-2, WITHOUT SPRING CENTERED



6-2 Kit:


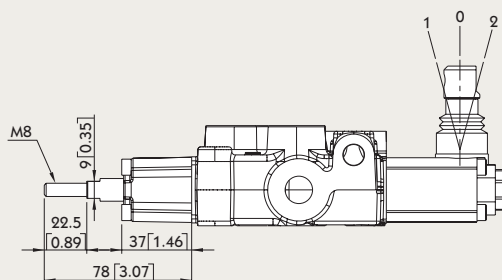
2 POSITIONS, DETENT IN POS. 0-2, WITHOUT SPRING CENTERED



6-3 Kit:

2 POSITIONS, DETENT IN POS. 1-0, WITHOUT SPRING CENTERED


Type 8D2



8D2 Kit:

WITH SPRING RETURN TO NEUTRAL POSITION AND PIN WITH M8 MALE THREAD FOR DUAL CONTROL

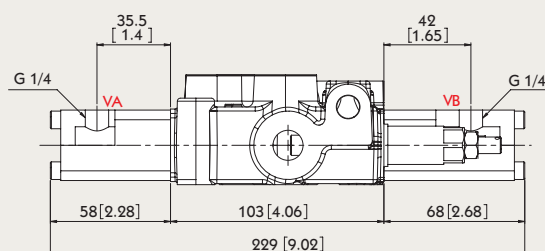Type 8IM



Operating features :

PILOT PRESSURE : MAX. 50 BAR


INTERNAL LEAKAGE A(B) -> T : MAX. 6 CM³/MIN (100 BAR / 40°C)



Monoblock Directional Control Valves

Type 8P

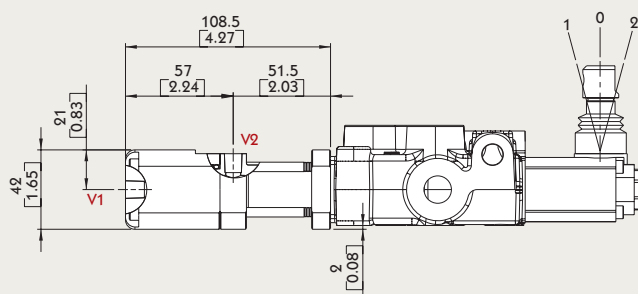
V1 & V2: NPT 1/8 - 27




Operating feature :

PILOT PRESSURE (MIN.): 5.5 BAR / 80 PSI

PILOT PRESSURE (MAX.): 10 BAR / 145 PSI



Type 8EP3

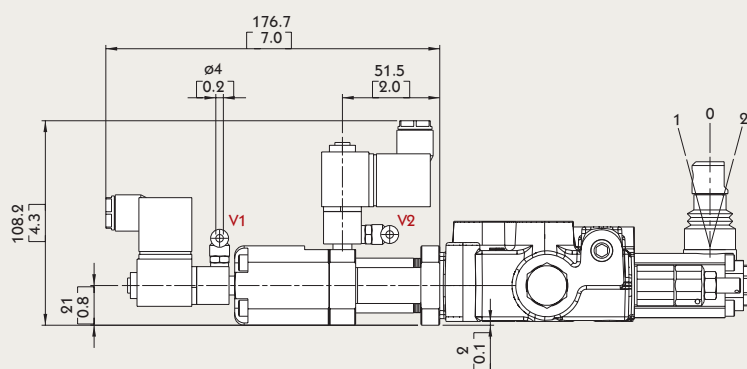


Solenoid operating features :

NOMINAL VOLTAGE: 24VDC

NOMINAL VOLTAGE TOLERANCE: $\pm 10\%$



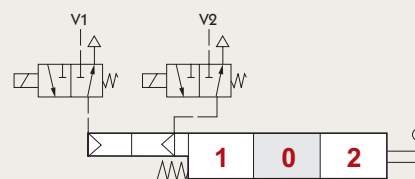
POWER RATING: 5W



MB-3 B Side

Monoblock Directional Control Valves

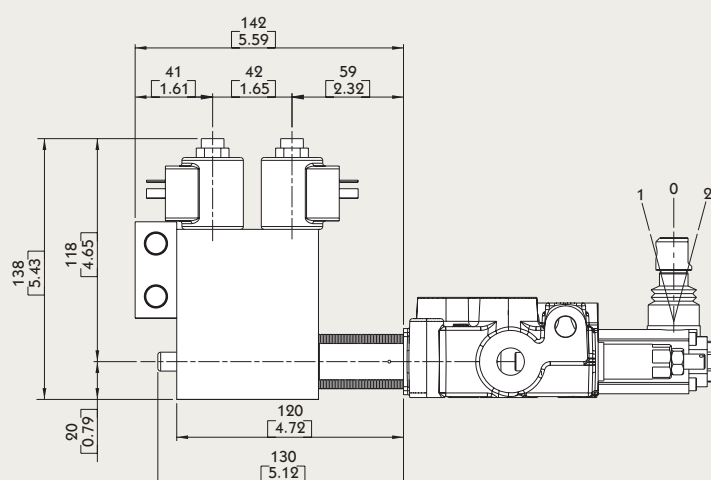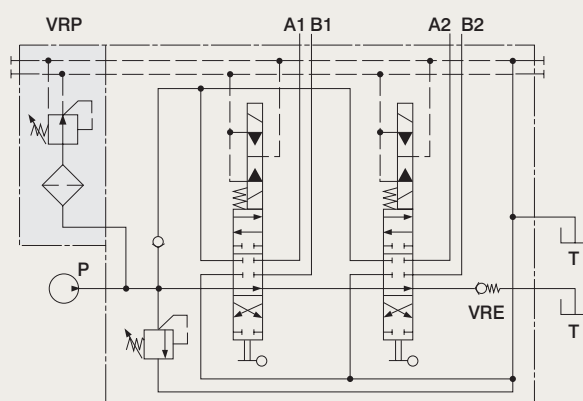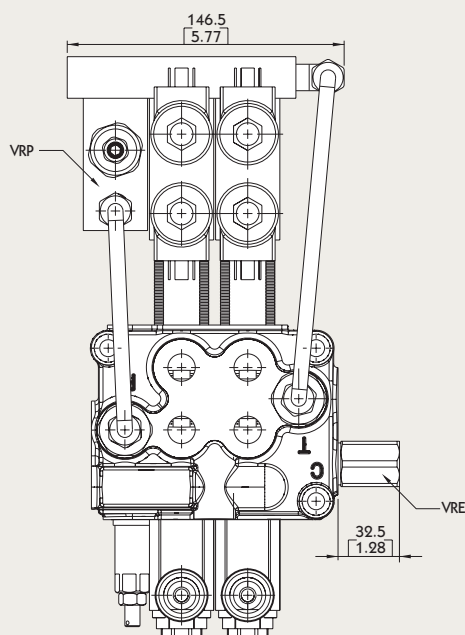Type 8ED3




Operating features :

PILOT PRESSURE: • MIN. 10 BAR / 145 PSI
• MAX. 50 BAR / 725 PSI

MAX. BACKPRESSURE ON DRAIN L: 25 BAR / 360PSI

Coil features :



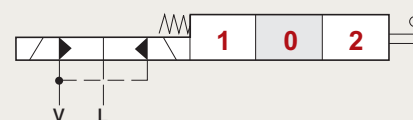
NOMINAL VOLTAGE TOLERANCE: $\pm 10\%$
ELECTRIC POWER: 21 W
STANDARD VOLTAGE: 12 VDC / 24 VDC



MB-3 B Side

Monoblock Directional Control Valves

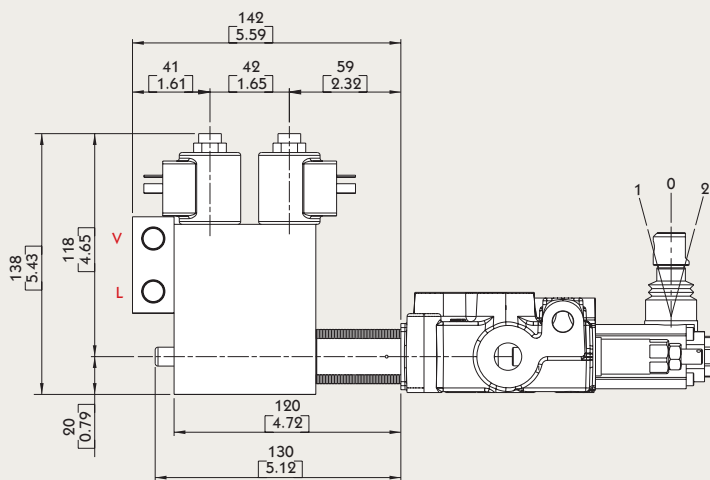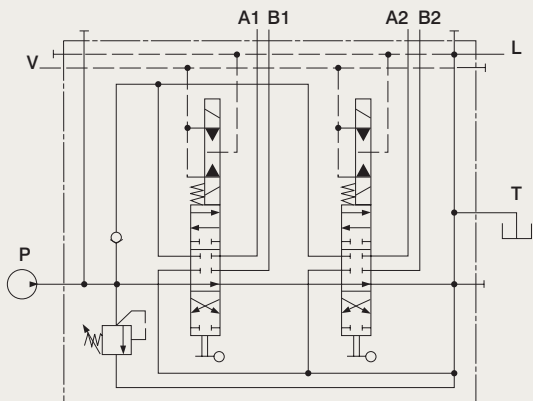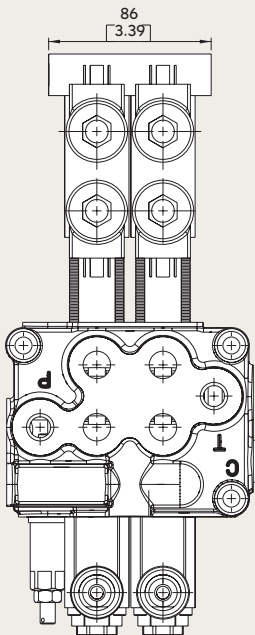Type 8ER3




Operating features :

- PILOT PRESSURE: • MIN. 10 BAR / 145 PSI
• MAX. 50 BAR / 725 PSI
- MAX. BACKPRESSURE ON DRAIN L: 25 BAR / 360PSI

Coil features :


- NOMINAL VOLTAGE TOLERANCE: $\pm 10\%$
ELECTRIC POWER: 21 W
STANDARD VOLTAGE: 12 VDC / 24 VDC



MB-3 B Side

Monoblock Directional Control Valves

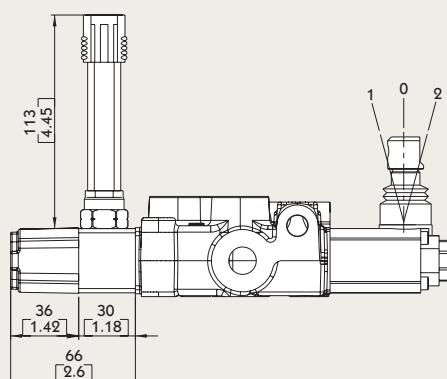Type 8MG




MICROSWITCH

Operating features :

MECHANICAL LIFE: • 5X10⁶ OPERATIONS

ELECTRICAL LIFE (RESISTIVE LOAD):

- 10⁶ OPERATIONS - 7A / 13.5 VDC
- 5x10⁴ OPERATIONS - 10A / 12 VDC
- 5x10⁴ OPERATIONS - 3A / 28 VDC



8MG1 Kit:

MICROSWITCH WITH MALE/FEMALE CONNECTOR, OPERATED IN POS. 1



8MG2 Kit:

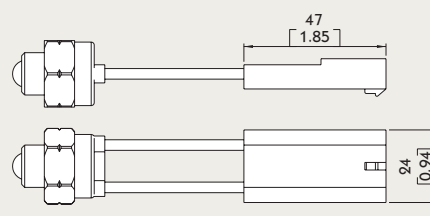
MICROSWITCH WITH MALE/FEMALE CONNECTOR, OPERATED IN POS. 2




8MG3 Kit:

MICROSWITCH WITH MALE/FEMALE CONNECTOR, OPERATED IN POS. 1 AND POS. 2

With NO contact (female connector with male end)





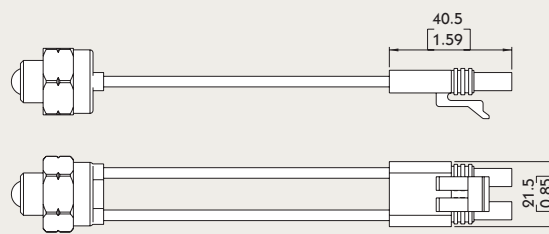
With NC contact (male connector with female end)



MB-3 B Side

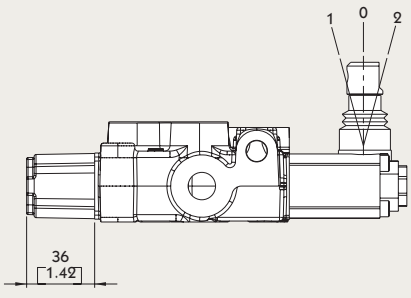Monoblock Directional Control Valves



Type 8		
		8 Kit: SPRING RETURN TO NEUTRAL POSITION.
		8-1 Kit: SPRING RETURN TO NEUTRAL POSITION. (2 POSITIONS)
		8-2 Kit: SPRING RETURN TO NEUTRAL POSITION. (2 POSITIONS)

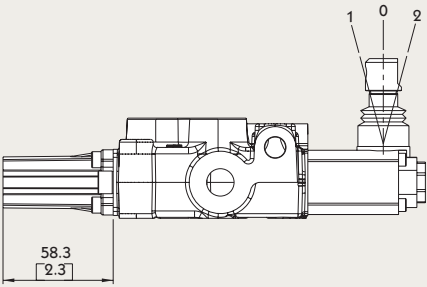Type 9		
		9-1 Kit: DETENT IN POS. 1, 2 WITH SPRING CENTERED
		9-2 Kit: DETENT IN POS. 2 WITH SPRING CENTERED
		9-3 Kit: DETENT IN POS. 1 WITH SPRING CENTERED

MB-3 B Side (Optional controls)


Monoblock Directional Control Valves

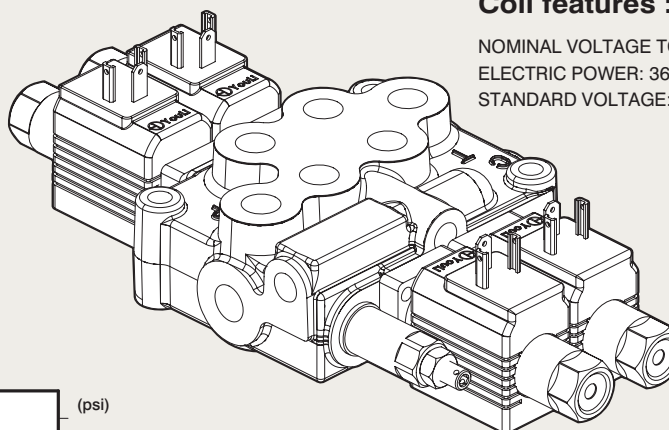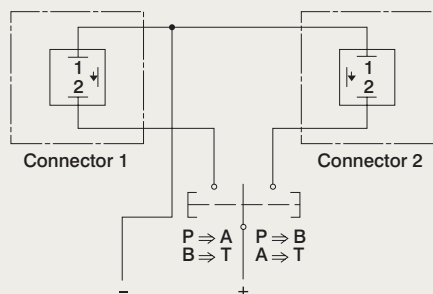Electric wiring example




Coil features :

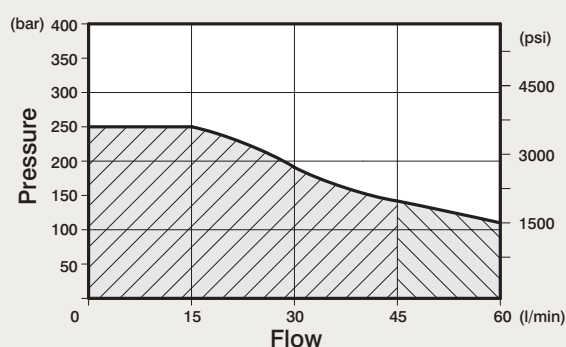NOMINAL VOLTAGE TOLERANCE: $\pm 10\%$
ELECTRIC POWER: 36 W
STANDARD VOLTAGE: 12 VDC / 24 VDC



Nominal flow rating		45 L/min	12 US gpm
Operating pressure (Max.)		250 bar	3650 psi
Back pressure (Max.)	on outlet port T	5 bar	70 psi
Fluid temperature	with NBR seals	-20°C~80°C	-4°F~176°F
	with FPM seals	-20°C~100°C	-4°F~212°F
Viscosity	Operating range	15mm ² /s~75mm ² /s	15~75 cst
	Max.	400mm ² /s	400 cst
	Min.	12mm ² /s	12 cst
Ambient temperature		-40°C~60°C	-40°F~140°F
Internal Leakage A(B)->T	$\Delta P = 100\text{bar at } 40^\circ\text{C}$	10 cm ³ /min	0.61 in ³ /min

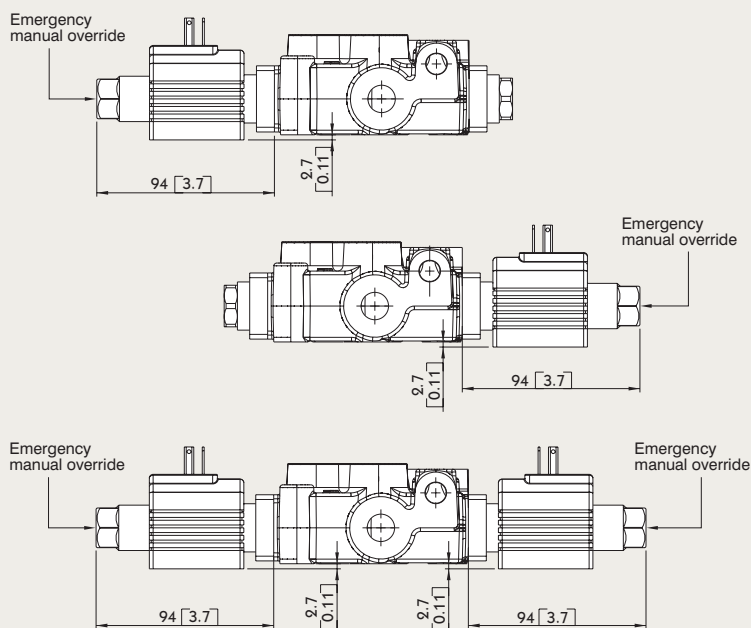Type 8ES



8ES1 Kit:
ACTING IN 1



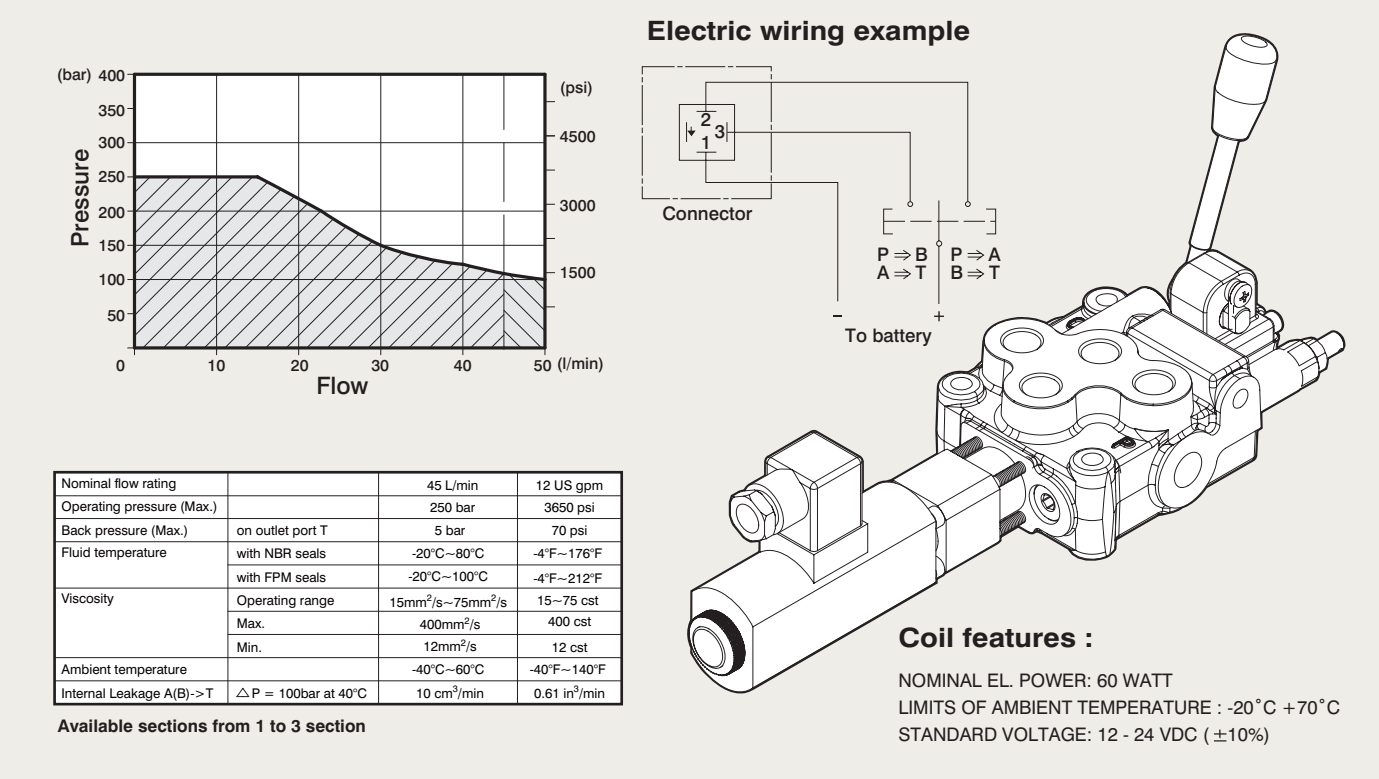
8ES2 Kit:
ACTING IN 2




8ES3 Kit:
ACTING IN 1 & 2

MB-3 B Side (Optional controls)

Monoblock Directional Control Valves














Type 8ESN

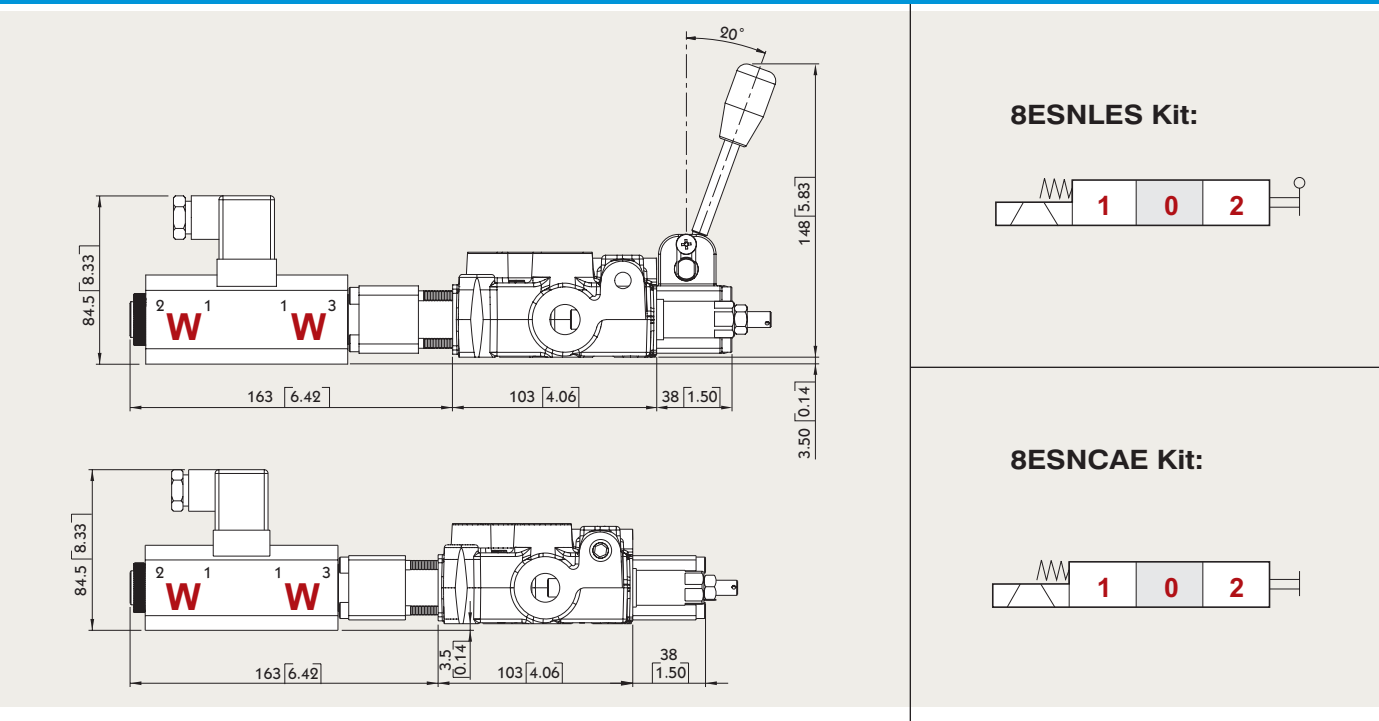







MB-3 special spool (Options for 8ES Kit)







Monoblock Directional Control Valves

Type 8ES3#1		
	P → A B → T C closed	
	A & B & P & T closed C open	
	P → B A → T C closed	
Type 8ES3#2		
	P → A B → T C closed	
	A & B → T P closed C open	
	P → B A → T C closed	

MB-3 special spool (Options for 8ESN Kit)

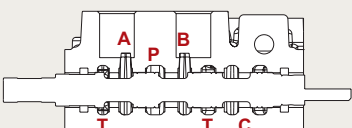Monoblock Directional Control Valves


Type 8ESN#1		
	P → A B → T C closed	
	P & T & A & B closed C open	
	P → B A → T C closed	

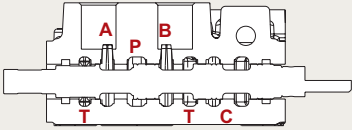Type 8ESN#2		
	P → A B → T C closed	
	A & B → T P closed C open	
	P → B A → T C closed	



MB-3 service and auxiliary valves

Monoblock Directional Control Valves


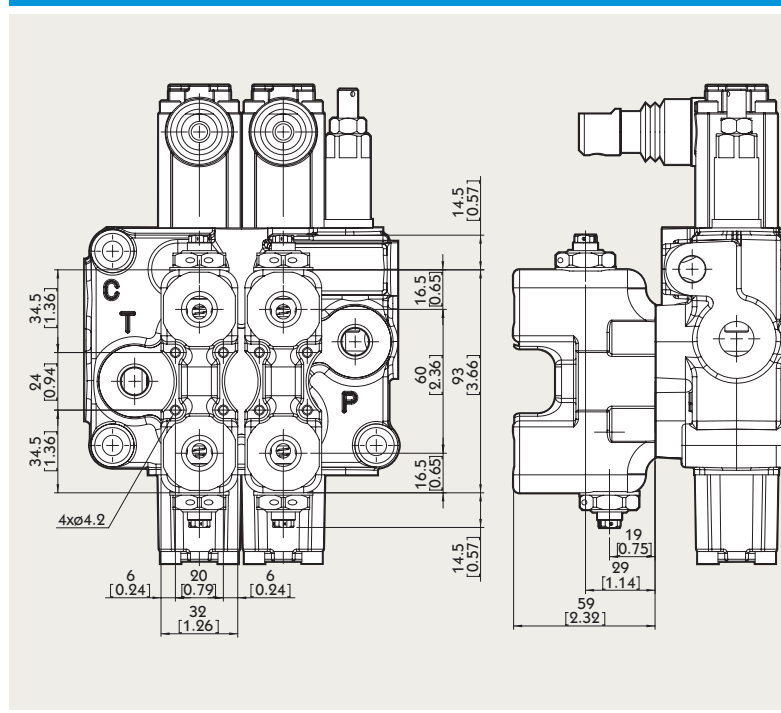
Type P





P1 Kit: Block with valve on port A




P2 Kit: Block with valve on port B





P3 Kit: Block with valve on port A and B




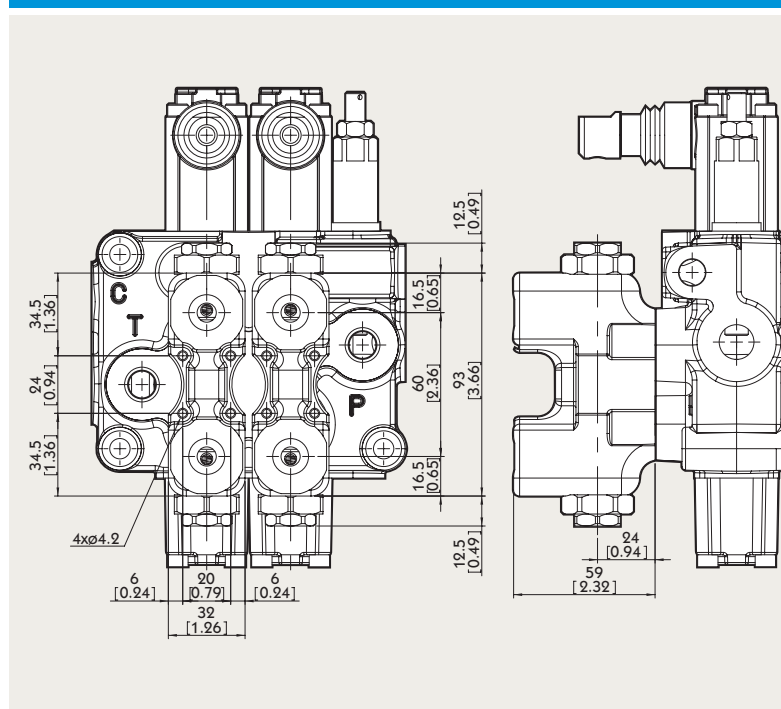
Type BPS Pilot check valves (With Pre-opening, supplied with mounting block)





BPS1 Kit: Block with valve on port A



BPS2 Kit: Block with valve on port B




BPS3 Kit: Block with valve on port A and B



MB-3 Accessories


Monoblock Directional Control Valves

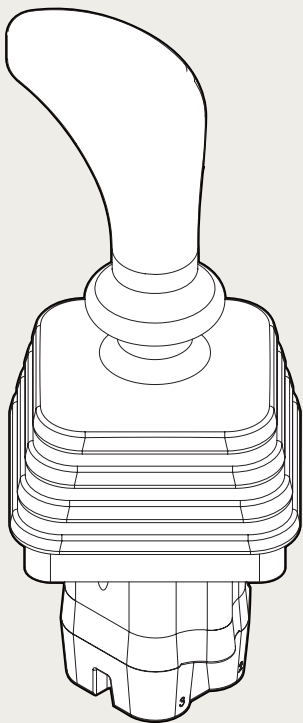Type JHP-2





Specifications:

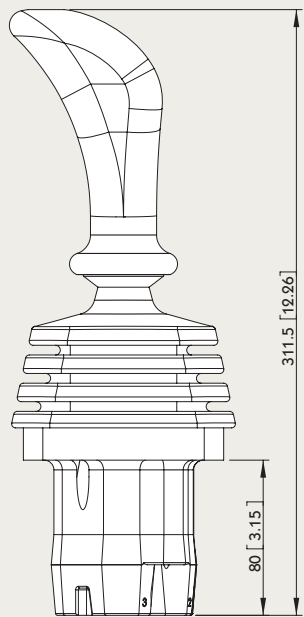- This data sheet shows technical spec. with mineral oil of 46 mm²/s (cSt) viscosity at 40°C (104°F)
- Flow : 5 ~ 20 LPM
- Feeding pressure : 30 ~ 100 bar
- Max. backpressure : 3 bar
- Internal leakage at 30 bar : 10 ~ 18 cm³/min
- Fluid : mineral oil
- Fluid temperature : - 10 ~ 80°C
- Ambient temperature : - 40 ~ 60°C



HYDRAULIC SCHEME:

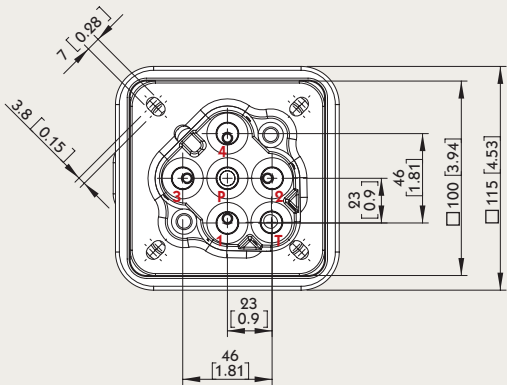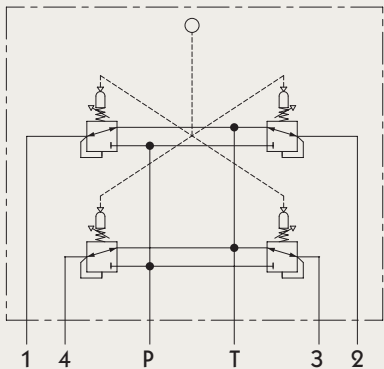



MB-3 Accessories

Monoblock Directional Control Valves


Type PHP-1

Specifications:

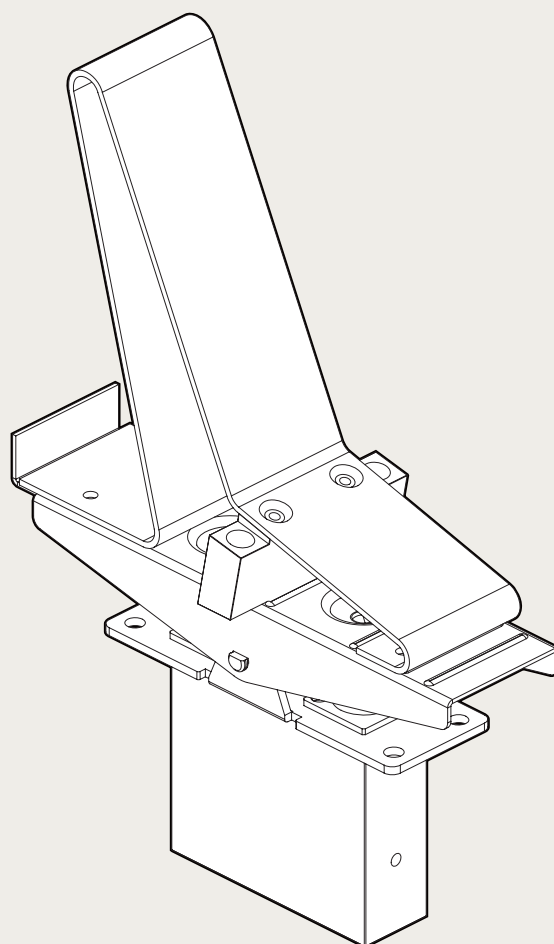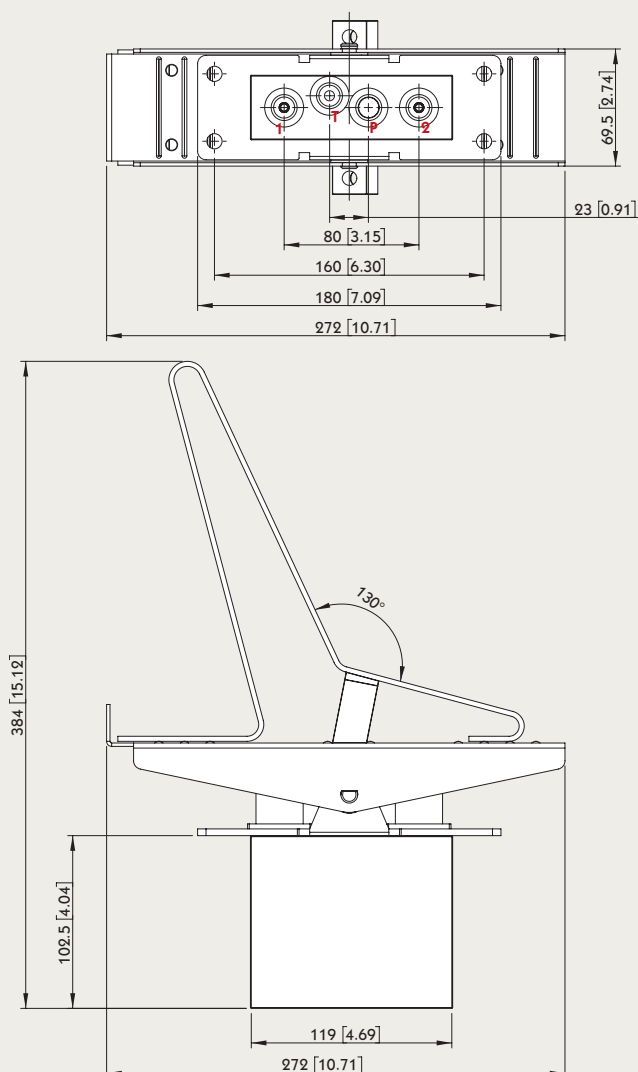- This data sheet shows technical spec. with mineral oil of 46 mm²/s (cSt) viscosity at 40 °C (104 °F)
- Flow : 5 ~ 20 LPM
- Feeding pressure : 30 ~ 100 bar
- Max. backpressure : 3 bar
- Internal leakage at 30 bar : 10 ~ 18 cm³/min
- Fluid : mineral oil
- Fluid temperature : - 10 ~ 80 °C
- Ambient temperature : - 40 ~ 60 °C



HYDRAULIC SCHEME:

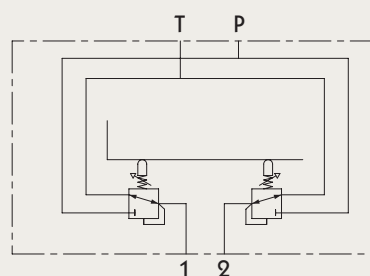

MB-3 Outlet

Monoblock Directional Control Valves

Power Beyond Conversion plug
(Closed center plug)

